


MANNVILLE
ALBERTA

WEST OF FOURTH MERIDIAN-OUEST DU QUATRIÈME MÉRIDIEN

Scale 1:50,000 Echelle



Produced by the SURVEYS AND MAPPING BRANCH, DEPARTMENT OF ENERGY, MINES AND REVENUE. Updated from aerial photographs taken in 1970. Cartographic scale 1:50,000.

Cartes mises à jour par le Service des levés et de la cartographie, Ministère de l'énergie, des mines et des ressources. Mise à jour à partir de photographies aériennes prises en 1970. Échelle cartographique 1:50,000.

© Canada Copyrights Reserved 1975

This Provisional Map is equivalent to a standard map of accuracy of contour.

Cette carte provisoire équivaut au cartogramme standard de précision de contour.

© Canada 1975, tous droits réservés.

GENERAL COMMENTS

DEPOSIT CHARACTERISTICS

Deposit Number	Material Description	Reserves (1000 m ³)		Additional Comments	Texture (%)			(% Wear)	Overburden Thickness (m)	Deposit Thickness (m)	Deposit Area (ha)	Deposit Genesis	Additional Comments	
		Gravel	Sand		Gravel	Sand	Fines							
1	Clean gravelly sand	35	80	Generally thin.	30	65	5	-	0.0	2.0-3.0	6.1	Outwash	Variable texture. No very coarse gravel.	
2	Clean sand	0	515	Limited uses, but used by county to sand roads. High water table. Semi-active pit.	0	96	5	-	0.1	2.5-5.0	15.2	Outwash	No gravel; very little coarse sand. Principally fine to medium sand.	
3	Clean sandy gravel	585	300	Used for road building and maintenance. Easy access. Active pit.	60	35	5	-	0.5	0.6-8.0	31.0	Outwash	Well graded. Petrographic #212. Mainly hard gneiss.	
4	Clean gravelly sand	460	490	West side of pit contains more sand, east side more gravel. Semi-active pit.	45	50	5	-	0.0	3.0	32.4	Outwash	No very coarse gravel. Variable texture. Some stratification of the sand.	
5	Dirty sandy gravel	40	30	Poor access. Inactive pit.	50	40	10	-	0.0	0.7-2.0	8.1	Outwash	Poorly sorted.	
6	Clean sand and gravel	-	-	Moderately extensive. Easy access.	-	-	-	-	0.1	1.5-3.0	83.0	Outwash Terrace	No data on aggregate texture or reserves available.	
7	Clean gravelly sand	55	80	Thin deposit in narrow stream trench.	40	55	5	-	0.0	0.0-1.8	14.2	Outwash	No very coarse gravel.	
8	Clean sand	40	1300	Thin, discontinuous. Limited uses.	<5	90-95	<5	-	0.2	0.0-8.0	46.5	Outwash	Some fine gravel.	

Deposit Number — Granular deposits shown on this map may have commercial possibilities. That assumption followed from two criteria used in the mapping process: study of the area considered only granular deposits greater than one metre thick, and covering an area more than one hectare, and it only considered deposits where the mineral-aggregate thickness was greater than the overburden thickness. Although the scale of mapping did not permit investigation of all small deposits, many small deposits containing existing pits are indicated.

Material Description — Sand and gravel has a variety of applications, such as concrete for construction, asphalt concrete, subbase and base course aggregate for roads, gravel and sand for road surfaces, and pit run for fill. Gradation, rock hardness, and binding characteristics, are some of the specific qualities that are considered in aggregate towards determining its end use. This map indicates these, and other, geological qualities of the sand and gravel within each deposit, but does not indicate their potential uses. The terms used in the table are defined in the figure below.

Reserves — The method of calculating in cubic metres the aggregate reserves of deposits took four basic steps. First, the area, in hectares, of each deposit was determined using aerial photographs. Second, geological interpretation, sometimes supported by subsurface information, was assumed in determining the geometry of each deposit, to estimate an overall, average deposit thickness in metres. Third, geological study and limited sample analysis determined the texture (gradation) of sediments in the deposit, and an overall average percentage of gravel and sand. Finally, the volume was calculated as follows: reserve gravel (m³) = area (ha) × thickness (m) × 10,000 × % gravel; the same formula was used for sand.


Texture — The texture of the sediment refers to the percentage of particles of various sizes. For mineral aggregate, the most important fractions are the gravel and sand. The actual dimensions of the clasts and particles in these fractions are given in the figure. The values given for a particular deposit were determined from a field estimate, or from laboratory analysis, of one or more samples from that deposit. Where more than one sample is taken the tabulated number is the mean value.

Wear — The resistance of gravel-size clasts to wear or abrasion can be measured in a laboratory test (ASTM C131, Los Angeles Abrasion Testing). The amount of material that breaks down into smaller sizes is measured and related to the original sample weight in terms of percent wear. The higher the percentage wear the more susceptible the gravel is to breakdown under stress. Gravel with a percentage wear of less than 40 is considered very resistant.

Overburden Thickness — The thickness of non-economic material, or overburden, covering a deposit, sometimes is a limiting factor in the exploitation of an aggregate deposit. The tabulated values given are approximate overburden thicknesses as determined from geological investigations and subsurface testing.


Deposit Area — Deposits in this study were delineated by interpretation of aerial photographs and the contacts should be considered approximate. Information is precise only where test holes, or geological sections, are indicated.

Deposit Genesis — The genesis, or formation, of deposits is vital to the understanding of the gradational nature, extent and geometry of the deposit. This understanding forms the basis for extrapolation from a limited number of known points (test holes, pits, sections) and permits an overall assessment of the deposit.

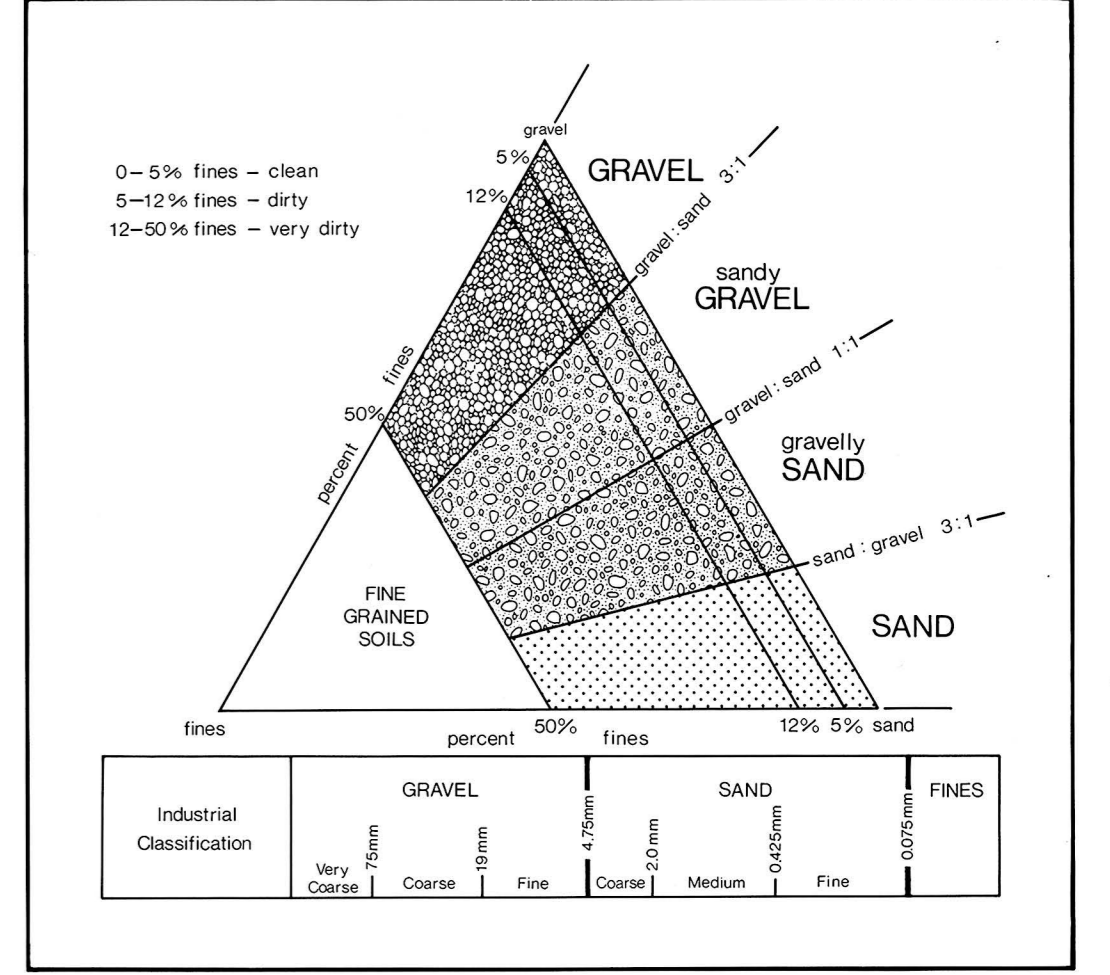

Map Legend

- 3 Deposit number
- Assumed boundary
- ▲ Active or inactive pit
- Alberta Geological Survey test hole
- ▲ Sand or gravel exposure
- ▲ Buried sand or Gravel deposit

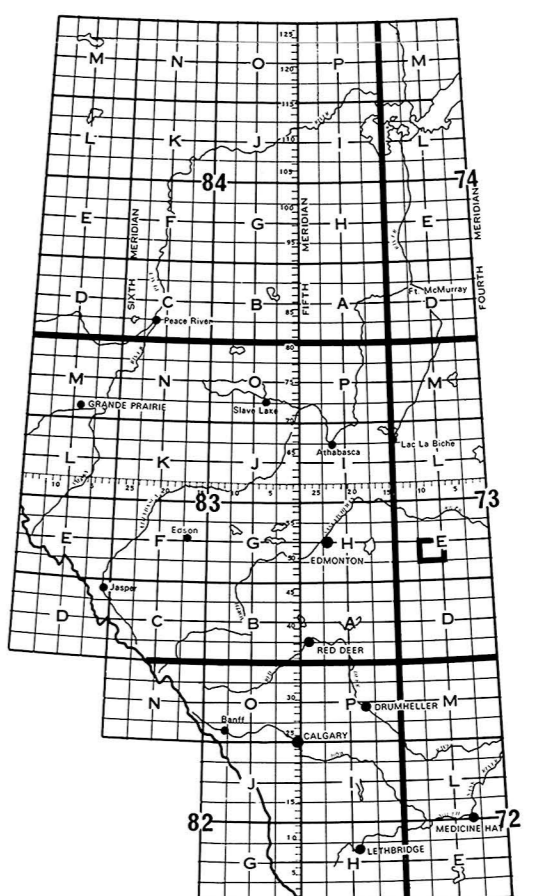

Alberta
RESEARCH COUNCIL
Natural Resources Division

Alberta Geological Survey

This is a sand and gravel resource map prepared by the Alberta Geological Survey as part of a series at a scale of 1:50,000. The series represents an ongoing aggregate inventory of Alberta which provides data for general land-use planning, land management or aggregate exploration. Please note that the delineation of deposits and calculation of reserves are approximations only.

REFERENCES
Geology by B.N. Peterson, 1973. Compilation by M.K. Jones, 1980. Additional information from R.B. Ellwood, 1980.

AGGREGATE RESOURCES
MANNVILLE 73E/6