

Deposit Number	Material Description	Reserves (1000 m ³)		Additional Comments	Texture (%)		(% Wear	Overburden Thickness (m)	Deposit Thickness (m)	Deposit Area (ha)	Deposit Genesis	Additional Comments	
		Gravel	Sand		Gravel	Fines						Additional	Comments
1	Very dirty gravelly sand	200	350	High percentage of deleterious material (fragile granites, ironstone concretions, soft sandstones). Semi-active pit.	30	55	15	0.0	0.0-4.0	28.4	Ice-contact	No very coarse or coarse gravel.	
2	Clean sand	75	285	Relatively easy access. Active pit.	20-25	75	<5	0.5	3.0-5.0	12.1	Outwash	High percentage of medium sand; no very coarse gravel.	
3	Dirty sandy gravel	990	720	Active pit.	50	40	10	0.1	0.0-6.0	60.9	Outwash Terrace	Low percentage of coarse sand. Petrographic #208: some hard gneiss and medium hard sandstone clasts are present.	
4	Clean gravelly sand	70	170	Sand and gravel is present in individual kames. Approximately 20% weathered carbonate and sandstone clasts. Semi-active pit.	25-30	70	<5	1.0-3.0	2.0-8.0	6.0	Kames	Variable texture and thickness of gravel beds. High percentage of fine to medium sand.	
5	Clean gravelly sand	510	640	Alternating beds of gravelly sand and medium to coarse sand.	40-55	55	<5	0.3	0.3-3.0	57.8	Outwash	Low percentage of very coarse gravel and fine sand.	
6	Clean gravelly sand	60	115	Easy access. Semi-active pit.	30-35	65	<5	0.0	0.0-3.0	9.0	Kame Terrace	No very coarse gravel, little coarse gravel.	
7	Clean gravelly sand	45	130	High water table.	25	70-75	<5	0.2	2.5	9.1	Outwash	No very coarse gravel, little coarse gravel. Thin, discontinuous.	

Deposit Number — Granular deposits shown on this map may have commercial possibilities. The assumption followed from two criteria used in the mapping process: study of the area considered only granular deposits greater than one metre thick, and covering an area more than one hectare; and if only considered deposits where the mineral aggregate thickness was greater than the overburden thickness. Although the scale of mapping did not permit investigation of all small deposits, many small deposits containing existing pits are indicated.

Material Description — Sand and gravel has a variety of applications, such as concrete for construction, asphalt concrete, subbase and base course aggregate for roads, gravel and sand for road surfaces, and pit run for fill. Gradation, rock hardness, and binding characteristics, are some of the specific qualities that are considered in aggregate towards determining its end use. This map indicates these, and other, geological qualities of the sand and gravel within each deposit, but does not indicate their potential uses. The terms used in the table are defined in the figure below.

Reserves — The method of calculating in cubic metres the aggregate reserves of deposits took four basic steps: First, the area, in hectares, of each deposit was determined using aerial photographs. Second, geological interpretation, sometimes supported by subsurface information, was assumed in determining the geometry of each deposit, to estimate an overall, average deposit thickness in metres. Third, geological study and limited sample analyses determined the texture (gradation) of sediments in the deposit, and an overall average percentage of gravel and sand. Finally, the volume was calculated as follows: reserve gravel (m³) = area (ha) × thickness (m) × 10,000 × % gravel; the same formula was used for sand.


Texture — The texture of the sediment refers to the percentage of particles of various sizes. For mineral aggregate, the most important fractions are the gravel and sand. The actual dimensions of the class and particles in these fractions are given in the figure. The values given for a particular deposit were determined from a field estimate, or from laboratory analysis of one or more samples from that deposit. Where more than one sample is taken the tabulated number is the mean value.

Wear — The resistance of gravel-size clasts to wear or abrasion can be measured in a laboratory test (ASTM-C131, Los Angeles Abrasion Testing). The amount of material that breaks down into smaller sizes is measured and related to the original sample weight in terms of percent wear. The higher the percentage wear the more susceptible the gravel is to breakdown under stress. Gravel with a percentage wear of less than 40 is considered very resistant.


Overburden Thickness — The thickness of non-economic material, or overburden, covering a deposit, sometimes is a limiting factor in the exploitation of an aggregate deposit. The tabulated values given are approximate overburden thicknesses as determined from geological investigations and subsurface testing.

Deposit Area — Deposits in this study were delineated by interpretation of aerial photographs and the contacts should be considered approximate. Information is precise only where test holes, or geological sections, are indicated.

Deposit Genesis — The genesis, or formation, of deposits is vital to the understanding of the gradational nature, extent and geometry of the deposit. This understanding forms the basis for extrapolation from a limited number of known points (test holes, pits, sections) and permits an overall assessment of the deposit.

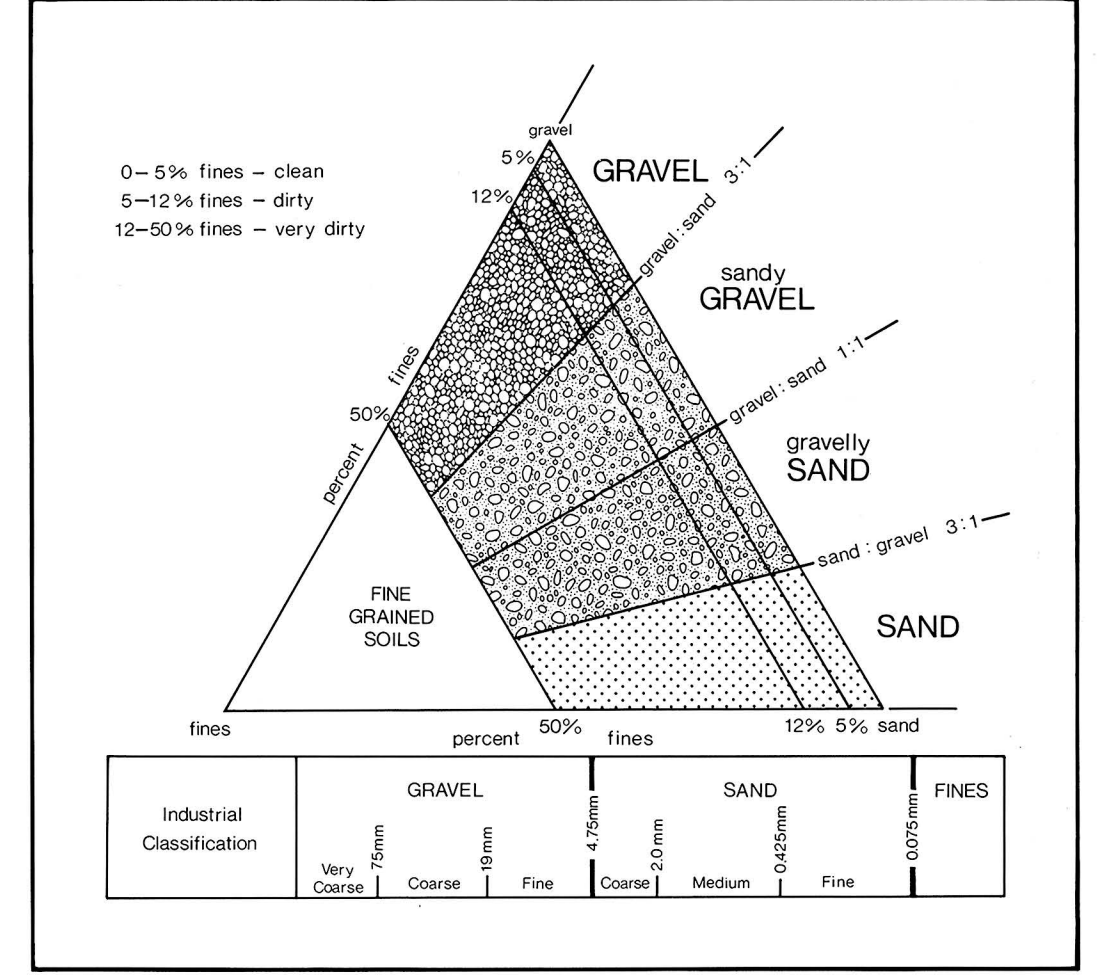

- Map Legend**
- 3 Deposit number
 - Assumed boundary
 - ⊕ Active or inactive pit
 - Alberta Geological Survey test hole
 - ▲ Sand or gravel exposure
 - ▨ Buried sand or Gravel deposit

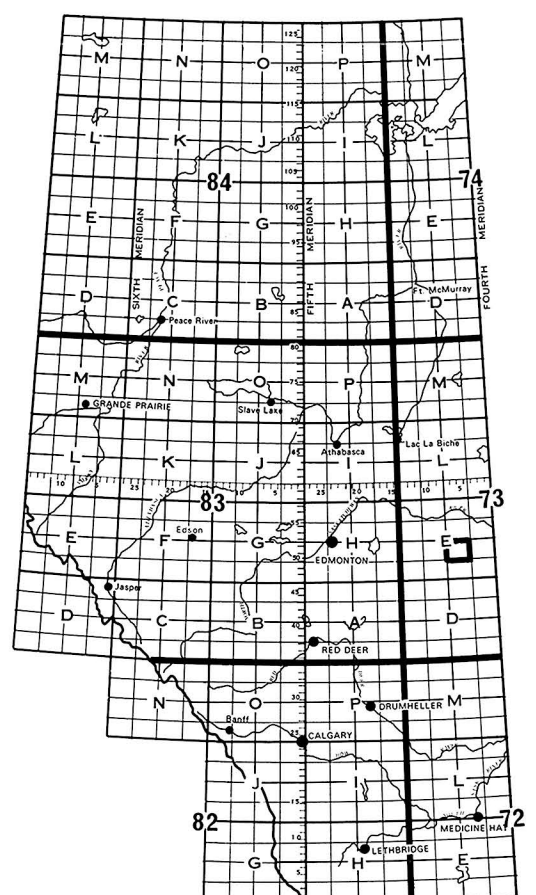

Alberta
RESEARCH COUNCIL
Natural Resources Division

Alberta Geological Survey

This is a sand and gravel resource map prepared by the Alberta Geological Survey as part of a series at a scale of 1:50,000. The series represents an ongoing aggregate inventory of Alberta which provides data for general land-use planning, land management or aggregate exploration. Please note that the delineation of deposits and calculation of reserves are approximations only.

REFERENCES
Geology by B.N. Peterson, 1979. Compilation by N.K. Jones, 1980. Additional information from R.B. Elwood, 1980.

AGGREGATE RESOURCES
VERMILION 73E/7

Produced by the SURVEYS AND MAPPING BRANCH, DEPARTMENT OF ENERGY, MINES AND RESOURCES. Modified from aerial photographs taken in 1970. Culture check 1976, Printed 1978.
Copies may be obtained from the Canada Map Office, Department of Energy, Mines and Resources, Ottawa, or your nearest map dealer.
© Canada Geographical Research 1975

VERMILION
ALBERTA
WEST OF FOURTH MERIDIAN - OUEST DU QUATRIÈME MÉRIDIEN
Scale 1:50,000 Échelle
Miles 0 1 2 3
Metres 0 1000 2000 3000 4000
Yards 0 1000 2000 3000 4000
CANTON INTERVAL 25 FEET
Elevations in Feet above Mean Sea Level
North American Datum 1927
Transverse Mercator Projection

This Provisional Map is equivalent to a standard map in accuracy of control.
Some names on this map are not yet official. Corrections or additions are invited by the Survey and Mapping Branch.

Cette carte provisoire équivaut à une carte régulière en ce qui concerne la précision des contrôles.
Certains noms inscrits sur cette carte ne sont pas encore officiels. Les corrections ou les additions sont invitées par le Service des levés et de la cartographie.

Édité par la DIRECTION DES LEVÉS ET DE LA CARTOGRAPHIE, MINISTÈRE DE L'ÉNERGIE, DES MINES ET DES RESSOURCES. Modifié à partir de photographies aériennes prises en 1970. Vérification des cultures 1976. Imprimé en 1978.
Des copies peuvent être obtenues au Bureau des Cartes du Canada, Ministère de l'Énergie, des Mines et des Ressources, Ottawa, ou chez votre marchand de cartes.
© Canada 1975. Tous droits réservés.