

Scale 1:50,000
 WEST OF THE FOURTH MERIDIAN - OUEST DU QUATRIEME MERIDIEN
 U.S.A. ALBERTA
 UNITED STATES OF AMERICA

DEPOSIT CHARACTERISTICS

Deposit Number	Material Description	Reserves (1000 Gravel Equivalent)	Additional Comments	Texture (Gravel, Sand, Fines)	(%) Wear	Overburden Thickness (m)	Deposit Thickness (m)	Deposit Age (yr)	Deposit Genesis	Additional Comments
1	Sandy gravel	381	Gravel coarse; sand fine to coarse grained.	85.0 to 70.0 29.7 to 44.0 0.2 to 0.6	-	-	0.8 to 1.8 Avg. 1.5	Recent alluvial	-	-
2	Sandy gravel	1871	Gravel coarse; sand fine to coarse grained.	62.4 to 78.1 32.3 to 37.2 0.4 to 0.6	-	-	2.1 to 3.7 Avg. 3	Recent alluvial	-	-
3	Gravelly sand	83	Sand fine to coarse grained; clay; gravel coarse and fine.	42.5 to 48.0 60.3 to 69.3 0.2 to 0.6	-	0	10.7	Kame	-	-
4	Sand	9	Gravel fine and coarse; sand coarse and medium grained; clay.	21.8 to 76.0 78.1 to 85.0 0.3 to 0.6	-	0	1.8	Kame	-	-
5	Gravel	466	Gravel fine, sand coarse and medium grained; clay.	76.0 to 85.0 23.4 to 40.0 0.6 to 0.8	-	0.3	2.7	Valley train	-	-
6	Sandy gravel	800	Gravel coarse; sand fine and medium grained.	85.0 to 89.2 40.0 to 45.0 0.4 to 0.6	-	-	1.8 to 3.0 Avg. 2.4	Recent alluvial	-	-
7	Sandy gravel	386	Gravel coarse; sand coarse and medium grained.	89.2 to 83.2 38.4 to 35.8 0.4 to 0.6	-	0	3	Kame	-	-
8	Sandy gravel and sand	1000	Gravel fine with lenses of coarse sand fine to coarse grained; clay.	83.2 to 88.8 35.8 to 30.4 0.8 to 0.6	-	1.2 to 2.4	2 to 5.5 Avg. 3.7	Kame	-	-
9	Sandy gravel and sand	190	Gravel coarse with lenses of fine sand and coarse grained; clay.	88.8 to 84.0 30.4 to 24.0 0.6 to 0.8	-	1.2 to 2.4	7.6 to 9.0	Kame	-	-
10	Sandy gravel	67	Gravel coarse and fine; sand coarse and medium grained; clay.	84.0 to 81.4 24.0 to 47.6 0.5 to 1.0	-	-	5.5	Valley train	-	-
11	-	-	Assumed on basis of surface mapping and topographic interpretation.	-	-	-	-	-	-	-
12	-	-	Assumed on basis of surface mapping and topographic interpretation.	-	-	-	-	-	-	-

GENERAL COMMENTS

Deposit Number — Granular deposits shown on this map may have commercial possibilities. That assumption followed from two criteria used in the mapping process: study of the area contacts and the overburden thickness. Only those deposits were mapped where the mineral aggregate thickness was greater than the overburden thickness. Although the scale of mapping did not permit investigation of all small deposits, many small deposits containing material suitable for use are indicated.

Material Description — Sand and gravel have a variety of characteristics, such as response to vibration, compaction, subgrade and base course aggregate for roads, gravel and sand for road surfaces, and pit run for fill. Gradation, rock hardness, and bedding characteristics, are some of the factors that affect the use of aggregate. The mineral aggregate thickness was measured at various distances from the deposit, and other geological features of the deposit, but does not indicate their potential uses. The terms used in the table are defined in the figure below.

Reserves — The method of calculating the aggregate reserves of deposits took four basic steps: first, the area, in hectares, of each deposit was determined on the basis of assumed in determining the geometry of each deposit; to estimate an overall, average deposit thickness, the deposit was divided into areas of uniform thickness; the average deposit thickness was determined from the assumed deposit thicknesses; and finally, the volume was calculated as follows: reserve gravel (m³) = area (ha) × thickness (m) × 10,000; % gravel, the same formula was used for sand.

Texture — The texture of the sediment refers to the percentage of particles of various sizes. For the clasts and particles in these fractions are given in the figure. The values given for particular deposits were determined from field observations and laboratory testing. The values given for particular deposits were determined from field observations and laboratory testing. The values given for particular deposits were determined from field observations and laboratory testing.

Overburden Thickness — The thickness of non-economic material, or overburden, covering a deposit, sometimes is a limiting factor in the exploitation of an aggregate deposit. The tabulated values given are based on field observations and laboratory testing. The values given for particular deposits were determined from field observations and laboratory testing.

Deposit Genesis — The genesis, or formation, of deposits is vital to the understanding of the deposit's nature, extent and geometry of the deposit. This understanding forms the basis for an overall assessment of the deposit.

Map Legend
 3 Deposit number
 Assumed boundary
 Active or inactive pit
 Alberta Geological Survey test hole
 Sand or gravel exposure
 Buried sand or gravel deposit

Deposit Area — The thickness of deposits is vital to the understanding of the deposit's nature, extent and geometry of the deposit. This understanding forms the basis for an overall assessment of the deposit.

Material Description — Sand and gravel have a variety of characteristics, such as response to vibration, compaction, subgrade and base course aggregate for roads, gravel and sand for road surfaces, and pit run for fill. Gradation, rock hardness, and bedding characteristics, are some of the factors that affect the use of aggregate. The mineral aggregate thickness was measured at various distances from the deposit, and other geological features of the deposit, but does not indicate their potential uses. The terms used in the table are defined in the figure below.

Reserves — The method of calculating the aggregate reserves of deposits took four basic steps: first, the area, in hectares, of each deposit was determined on the basis of assumed in determining the geometry of each deposit; to estimate an overall, average deposit thickness, the deposit was divided into areas of uniform thickness; the average deposit thickness was determined from the assumed deposit thicknesses; and finally, the volume was calculated as follows: reserve gravel (m³) = area (ha) × thickness (m) × 10,000; % gravel, the same formula was used for sand.

Texture — The texture of the sediment refers to the percentage of particles of various sizes. For the clasts and particles in these fractions are given in the figure. The values given for particular deposits were determined from field observations and laboratory testing. The values given for particular deposits were determined from field observations and laboratory testing.

Overburden Thickness — The thickness of non-economic material, or overburden, covering a deposit, sometimes is a limiting factor in the exploitation of an aggregate deposit. The tabulated values given are based on field observations and laboratory testing. The values given for particular deposits were determined from field observations and laboratory testing.

DEPOSIT CHARACTERISTICS

Deposit Number	Material Description	Reserves (1000 Gravel Equivalent)	Additional Comments	Texture (Gravel, Sand, Fines)	(%) Wear	Overburden Thickness (m)	Deposit Thickness (m)	Deposit Age (yr)	Deposit Genesis	Additional Comments
1	Sandy gravel	381	Gravel coarse; sand fine to coarse grained.	85.0 to 70.0 29.7 to 44.0 0.2 to 0.6	-	-	0.8 to 1.8 Avg. 1.5	Recent alluvial	-	-
2	Sandy gravel	1871	Gravel coarse; sand fine to coarse grained.	62.4 to 78.1 32.3 to 37.2 0.4 to 0.6	-	-	2.1 to 3.7 Avg. 3	Recent alluvial	-	-
3	Gravelly sand	83	Sand fine to coarse grained; clay; gravel coarse and fine.	42.5 to 48.0 60.3 to 69.3 0.2 to 0.6	-	0	10.7	Kame	-	-
4	Sand	9	Gravel fine and coarse; sand coarse and medium grained; clay.	21.8 to 76.0 78.1 to 85.0 0.3 to 0.6	-	0	1.8	Kame	-	-
5	Gravel	466	Gravel fine, sand coarse and medium grained; clay.	76.0 to 85.0 23.4 to 40.0 0.6 to 0.8	-	0.3	2.7	Valley train	-	-
6	Sandy gravel	800	Gravel coarse; sand fine and medium grained.	85.0 to 89.2 40.0 to 45.0 0.4 to 0.6	-	-	1.8 to 3.0 Avg. 2.4	Recent alluvial	-	-
7	Sandy gravel	386	Gravel coarse; sand coarse and medium grained.	89.2 to 83.2 38.4 to 35.8 0.4 to 0.6	-	0	3	Kame	-	-
8	Sandy gravel and sand	1000	Gravel fine with lenses of coarse sand fine to coarse grained; clay.	83.2 to 88.8 35.8 to 30.4 0.8 to 0.6	-	1.2 to 2.4	2 to 5.5 Avg. 3.7	Kame	-	-
9	Sandy gravel and sand	190	Gravel coarse with lenses of fine sand and coarse grained; clay.	88.8 to 84.0 30.4 to 24.0 0.6 to 0.8	-	1.2 to 2.4	7.6 to 9.0	Kame	-	-
10	Sandy gravel	67	Gravel coarse and fine; sand coarse and medium grained; clay.	84.0 to 81.4 24.0 to 47.6 0.5 to 1.0	-	-	5.5	Valley train	-	-
11	-	-	Assumed on basis of surface mapping and topographic interpretation.	-	-	-	-	-	-	-
12	-	-	Assumed on basis of surface mapping and topographic interpretation.	-	-	-	-	-	-	-

GENERAL COMMENTS

Deposit Number — Granular deposits shown on this map may have commercial possibilities. That assumption followed from two criteria used in the mapping process: study of the area contacts and the overburden thickness. Only those deposits were mapped where the mineral aggregate thickness was greater than the overburden thickness. Although the scale of mapping did not permit investigation of all small deposits, many small deposits containing material suitable for use are indicated.

Material Description — Sand and gravel have a variety of characteristics, such as response to vibration, compaction, subgrade and base course aggregate for roads, gravel and sand for road surfaces, and pit run for fill. Gradation, rock hardness, and bedding characteristics, are some of the factors that affect the use of aggregate. The mineral aggregate thickness was measured at various distances from the deposit, and other geological features of the deposit, but does not indicate their potential uses. The terms used in the table are defined in the figure below.

Reserves — The method of calculating the aggregate reserves of deposits took four basic steps: first, the area, in hectares, of each deposit was determined on the basis of assumed in determining the geometry of each deposit; to estimate an overall, average deposit thickness, the deposit was divided into areas of uniform thickness; the average deposit thickness was determined from the assumed deposit thicknesses; and finally, the volume was calculated as follows: reserve gravel (m³) = area (ha) × thickness (m) × 10,000; % gravel, the same formula was used for sand.

Texture — The texture of the sediment refers to the percentage of particles of various sizes. For the clasts and particles in these fractions are given in the figure. The values given for particular deposits were determined from field observations and laboratory testing. The values given for particular deposits were determined from field observations and laboratory testing.

Overburden Thickness — The thickness of non-economic material, or overburden, covering a deposit, sometimes is a limiting factor in the exploitation of an aggregate deposit. The tabulated values given are based on field observations and laboratory testing. The values given for particular deposits were determined from field observations and laboratory testing.

Deposit Genesis — The genesis, or formation, of deposits is vital to the understanding of the deposit's nature, extent and geometry of the deposit. This understanding forms the basis for an overall assessment of the deposit.

Map Legend
 3 Deposit number
 Assumed boundary
 Active or inactive pit
 Alberta Geological Survey test hole
 Sand or gravel exposure
 Buried sand or gravel deposit


Deposit Area — The thickness of deposits is vital to the understanding of the deposit's nature, extent and geometry of the deposit. This understanding forms the basis for an overall assessment of the deposit.

Material Description — Sand and gravel have a variety of characteristics, such as response to vibration, compaction, subgrade and base course aggregate for roads, gravel and sand for road surfaces, and pit run for fill. Gradation, rock hardness, and bedding characteristics, are some of the factors that affect the use of aggregate. The mineral aggregate thickness was measured at various distances from the deposit, and other geological features of the deposit, but does not indicate their potential uses. The terms used in the table are defined in the figure below.

Reserves — The method of calculating the aggregate reserves of deposits took four basic steps: first, the area, in hectares, of each deposit was determined on the basis of assumed in determining the geometry of each deposit; to estimate an overall, average deposit thickness, the deposit was divided into areas of uniform thickness; the average deposit thickness was determined from the assumed deposit thicknesses; and finally, the volume was calculated as follows: reserve gravel (m³) = area (ha) × thickness (m) × 10,000; % gravel, the same formula was used for sand.

Texture — The texture of the sediment refers to the percentage of particles of various sizes. For the clasts and particles in these fractions are given in the figure. The values given for particular deposits were determined from field observations and laboratory testing. The values given for particular deposits were determined from field observations and laboratory testing.

Overburden Thickness — The thickness of non-economic material, or overburden, covering a deposit, sometimes is a limiting factor in the exploitation of an aggregate deposit. The tabulated values given are based on field observations and laboratory testing. The values given for particular deposits were determined from field observations and laboratory testing.

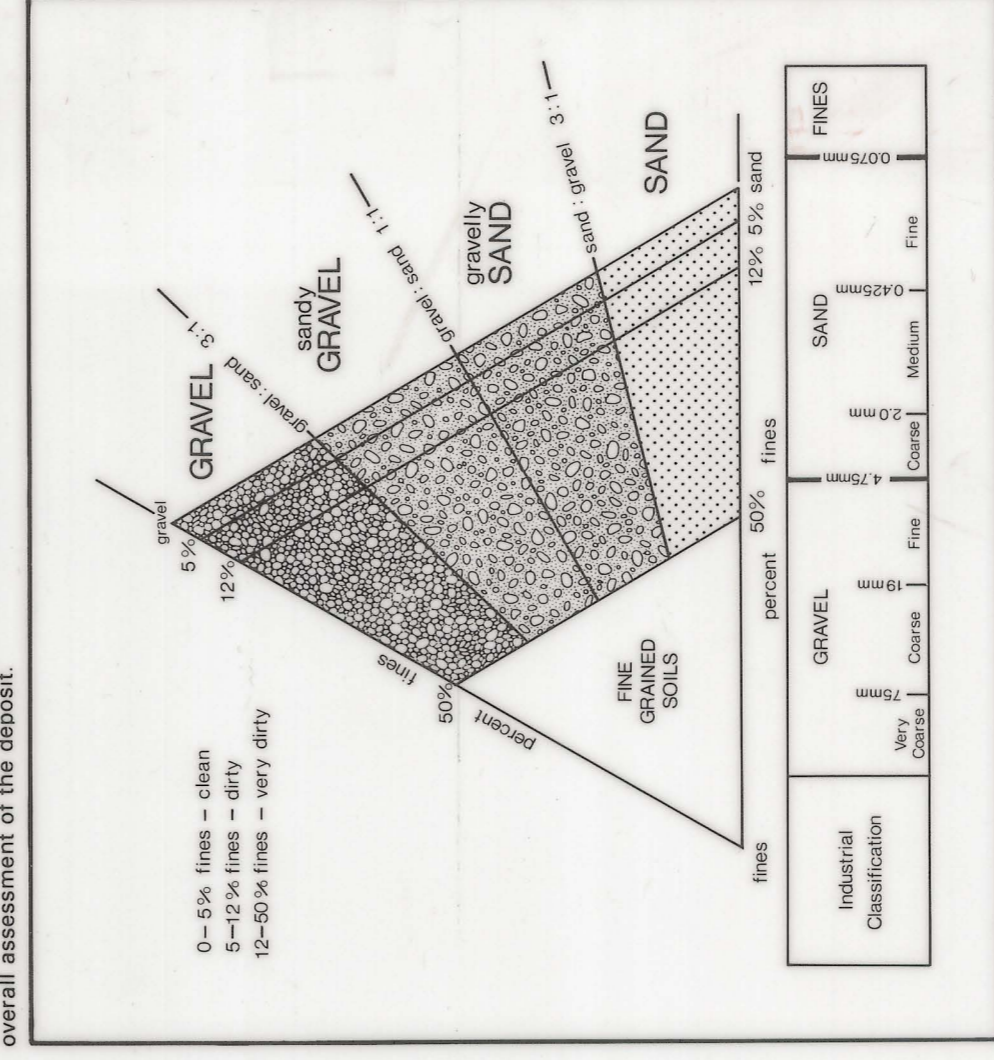

Alberta Geological Survey

This is a sand and gravel resource map prepared by the Alberta Geological Survey as part of a series at a scale of 1:50,000. The map represents the estimated aggregate reserves of sand and gravel deposits in the Waterton Lakes area. The map is intended for planning and management of aggregate resources. Please note that the delineation of deposits and calculation of reserves are approximations only. Alberta Energy and Natural Resources provides financial support for the Aggregate Inventory.

REFERENCE:
 Geology and correlation by L. Sharrow, revised from Earth Sciences Report 81-4.

AGGREGATE RESOURCES
 WATERTON LAKES 82H/4

Published by the Alberta Geological Survey
 Edmonton, Alberta
 Department of Energy, Mines and Technical Surveys
 Ottawa, Ontario K1A 0S8