

GENERAL COMMENTS **DEPOSIT CHARACTERISTICS**

Deposit Number	Material Description	Reserves (1000 m³)		Additional Comments	Texture (%)		(%) Wear	Overburden Thickness (m)	Deposit Thickness (m)	Deposit Area (ha)	Deposit Genesis	Additional Comments
		Gravel	Sand		Gravel	Fines						
1	Gravel	900	100	Gravel, 85%-95% fine and coarse; sand, mainly fine, silty.	-	-	-	0.5	More than 1.8	70	Fluvial-terrace	Overburden of fine sand.
2	Sandy gravel	1160	428	Gravel, 70%-75% fine and coarse; sand, medium and coarse, clean.	72.5	26.8	0.7	-	4.5-8.5	38	Glaciofluvial-ice contact	-
3	Sandy gravel	134	64	Gravel, 60%-75% fine and coarse; sand, fine, silty.	-	-	-	0.0-0.6	2.0	15	Fluvial-terrace	Discontinuous overburden of fine sand.
4	Gravel	59	12	Gravel, 75%-85% fine and coarse; sand, fine to coarse, silty.	78.7	16.3	5.0	-	3.0-4.5	2	Fluvial-terrace	-
5	Gravel	120	28	Gravel, 80% fine and coarse; sand, fine to coarse, clean.	-	-	-	0.0	2.0	7	Glaciofluvial-channel	-
6	Sandy gravel	36	22	Gravel, 50%-70% fine and coarse; sand, fine and medium, clean.	-	-	-	0.5-1.0	1.5-2.0	4	Glaciofluvial-channel	Overburden of silt.
7	Gravel	789	165	Gravel, 80%-85% fine and coarse; sand, fine to coarse, clean.	78.9	16.5	4.6	-	0.0-0.5	30	Glaciofluvial-ice contact	Discontinuous overburden of silt.
8	Gravel to sandy gravel	2589	384	Gravel, 70%-95% coarse, some fine; sand, fine and medium, clean.	86.3	12.8	0.9	-	0.0-1.5	70	Fluvial-terrace	Discontinuous overburden of silt.
9	Gravel to gravelly sand	91	52	Gravel, 40%-85% fine and coarse; sand, fine to coarse, clean to dirty.	61.1	34.7	4.2	-	0.8-1.0	6	Glaciofluvial-delta	Overburden of silt.
10	Sandy gravel	30	26	Gravel, 60% fine and coarse; sand, fine to coarse, silty and clayey.	-	-	-	0.0	4.0	1.5	Glaciofluvial-ice contact esker	-
11	Gravel to sandy gravel	220	126	Gravel, 50%-75% fine and coarse; sand, fine to coarse, clean.	77.7	21.3	1.0	-	0.0-1.5	15	Glaciofluvial-ice contact	Discontinuous overburden.
12	Sandy gravel	430	254	Gravel, 50% to 65% fine and coarse; sand, fine to coarse, moderately clean.	61.7	36.4	1.9	-	0.0-1.0	60	Fluvial-terrace	Discontinuous overburden of silty sand and silt.
13	Sand and/or gravel	-	-	Identified on aerial photos as a potential deposit.	-	-	-	-	-	-	-	-
14	Sand and/or gravel	-	-	Presence of deposit confirmed.	-	-	-	-	-	-	-	No information available.

Deposit Number — Granular deposits shown on this map may have commercial possibilities. That assumption followed from two criteria used in the mapping process: study of the area considered only granular deposits greater than one metre thick, and covering an area more than one hectare, and only considered deposits where the mineral aggregate thickness was greater than the overburden thickness. Although the scale of mapping did not permit investigation of all small deposits, many small deposits containing existing pits are indicated.

Material Description — Sand and gravel has a variety of applications, such as concrete for construction, asphalt concrete, subbase and base course aggregate for roads, gravel and sand for road surfaces, and pit run for fill. Gradation, rock hardness, and binding characteristics, are some of the specific qualities that are considered in aggregate towards determining its end use. This map indicates these, and other, geological qualities of the sand and gravel within each deposit, but does not indicate their potential uses. The terms used in the table are defined in the figure below.

Reserves — The method of calculating in cubic metres the aggregate reserves of deposits took four basic steps. First, the area, in hectares, of each deposit was determined using aerial photographs. Second, geological interpretation, sometimes supported by subsurface information, was assumed in determining the geometry of each deposit, to estimate an overall, average deposit thickness in metres. Third, geological study and limited sample analyses determined the texture (gradation) of sediments in the deposit, and an overall average percentage of gravel and sand. Finally, the volume was calculated as follows: reserve gravel (m³) = area (ha) × thickness (m) × 10,000 × % gravel; the same formula was used for sand.



Texture — The texture of the sediment refers to the percentage of particles of various sizes. For mineral aggregate, the most important fractions are the gravel and sand. The actual dimensions of the clasts and particles in these fractions are given in the figure. The values given for a particular deposit were determined from a field estimate, or from laboratory analysis, of one or more samples from that deposit. Where more than one sample is taken the tabulated number is the mean value.

Wear — The resistance of gravel-size clasts to wear or abrasion can be measured in a laboratory test (ASTM C121, Los Angeles Abrasion Test). The amount of material that breaks down into smaller sizes is measured and related to the original sample weight in terms of percent wear. The higher the percentage wear the more susceptible the gravel is to breakdown under stress. Gravel with a percentage wear of less than 40 is considered very resistant.

Overburden Thickness — The thickness of non-economic material, or overburden, covering a deposit, sometimes is a limiting factor in the exploitation of an aggregate deposit. The tabulated values given are approximate overburden thicknesses as determined from geological investigations and subsurface testing.

Deposit Area — Deposits in this study were delineated by interpretation of aerial photographs and the contacts should be considered approximate. Information is precise only where test holes, or geological sections, are indicated.

Deposit Genesis — The genesis, or formation, of deposits is vital to the understanding of the gradational nature, extent and geometry of the deposit. This understanding forms the basis for extrapolation from a limited number of known points (test holes, pits, sections) and permits an overall assessment of the deposit.

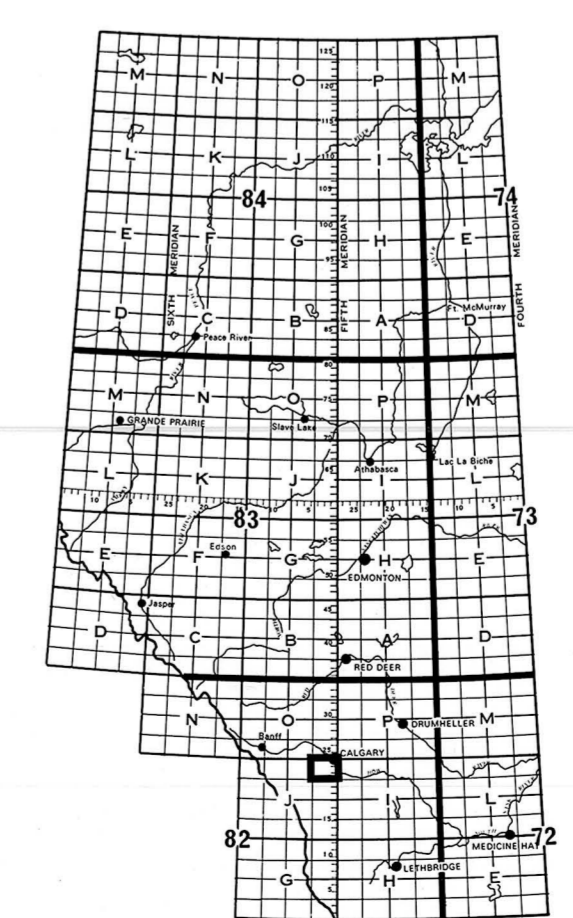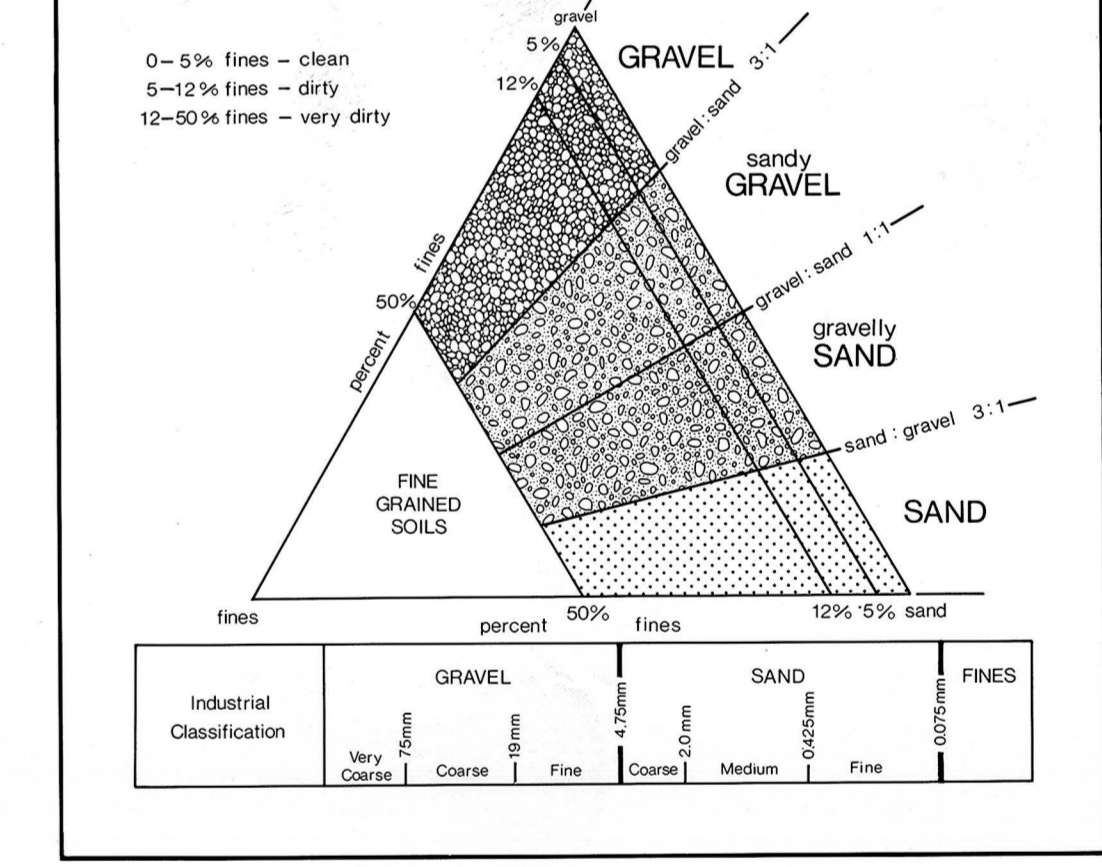

- Map Legend**
- 3 Deposit number
 - Assumed boundary
 - Active or inactive pit
 - Alberta Geological Survey test hole
 - Sand or gravel exposure
 - Buried sand or Gravel deposit

Aggregate Resources

82 J/16 Priddis

I. Shelton
Geology 1981

This is a sand and gravel resource map prepared by the Alberta Geological Survey as part of a series of maps at a scale of 1:50,000. The series represents an ongoing aggregate inventory of Alberta which provides data for general land-use planning, land management and aggregate exploration. Please note that the delineation of deposits and calculations of reserves are approximations only. Alberta Energy and Natural Resources provides financial support for the Aggregate Inventory.

Copyright by Alberta Research Council, Graphic Services, J.K. Mathis.



PRIDDIS ALBERTA
Scale 1:50,000 Échelle

Contours Interval: 5 Feet / Divisiones de Intervalo: 1.52 Metros

Vertical Datum: 1927 / Datum Vertical: 1927

Horizontal Datum: True North / Datum Horizontal: Verdadero Norte

Map Legend (continued):

- Gravel: 5-12% fines - dirty
- Gravel: 12-50% fines - very dirty
- Gravel: 50% fines - clean
- Sand: 12% - 5% sand
- Sand: 5% - 12% sand
- Sand: 12% - 5% sand
- Sand: 5% - 12% sand