

Deposit Number	Material Description	Reserves (1000 m³)		Additional Comments	Texture (%)			Overburden Thickness (m)	Deposit Thickness (m)	Deposit Area (ha)	Deposit Genesis	Additional Comments
		Gravel	Sand		Gravel	Sand	Fines					
1	Clean sandy gravel	761	531	Poor quality; high water table; inactive.	58	41	1	0.5	3.5	37	Glaciofluvial	Outwash, PE clasts common; contains deleterious rock.
2	Clean sandy gravel	6,246	3,318	Moderate quality; water table below 7m; good access.	64	34	2	1.0	8.0	122	Glaciofluvial over-Preglacial	Ice-contact; till blocks overlying fractured preglacial gravel.
3	Clean sandy gravel	382	1,624	Poor quality; road out exposure.	70	29	1	1.0	2.0	28	Glaciofluvial	Outwash; PE clasts common.
4	Clean gravel	-	-	Reclaimed Driedmeat Hill.	-	-	-	-	-	26	Preglacial	Fractured; limited data available.
5	Clean sandy gravel	10,044	8,184	Moderate to good quality; major aggregate sources; good access.	54	44	2	5.0	6.0	310	Glaciofluvial	Terrace deposit; high % quartzite; some PE clasts and deleterious materials.
6	Clean gravel	481	138	Moderate quality; water table at 3m; partly reclaimed.	77	22	1	0.5	2.5	25	Glaciofluvial	High terrace deposit; high % of quartzite and PE clasts.
7	Clean sandy gravel	832	752	Poor quality; used by local farmers only.	52	47	1	0.5	2.0	80	Glaciofluvial	High terrace.
8	Clean sandy gravel	2,107	903	Excavated since 1940s; depleted and partly reclaimed.	70	30	1	1.0	3.5	86	Glaciofluvial/Preglacial	Limited data available.
9	Clean sand	90	4,365	Mainly confined along ridges; clean medium sand.	2	97	1	<0.5	<3.0	150	Glaciofluvial	Outwash deposit.
10	Sand and gravel	-	-	Highly disturbed; abandoned; limited data available.	-	-	-	varies	varies	36	Glaciofluvial	Reworked preglacial; high % quartzite with minor PE clasts; partly cemented.
11	Clean gravel	2,075	539	Large excavation; easy access.	77	20	2	3.0	5.5	49	Preglacial	High terrace; thicker till overburden towards north.
12	Clean sandy gravel	1,872	1,856	Deposit may have potential for sand and gravel; water table varies.	52	46	2	4.0	4.0	90	Preglacial	High terrace; bedrock shale underneath Preglacial gravel.
13	Clean gravelly sand	1,324	1,656	Poor access; thickness varies; pea gravel common.	44	55	1	0.5	3.5	86	Glaciofluvial	Interbedded layers of sand and gravel.
14	Clean sandy gravel	3,120	2,820	Hilly to flat; good pea gravel; thickness of deposit varies.	52	47	1	5.0	6.0	100	Preglacial	Fractured quartzite, mainly covered by till and lying on bedrock.
15	Clean sandy gravel	38,750	15,725	Thickness varies; discontinuous; relatively easy access.	69	28	3	1.0	4.0	1,404	Glaciofluvial	Meltwater channel deposit; may have buried gravel beneath.

Deposit Number — Granular deposits shown on this map may have commercial possibilities. That assumption followed from two criteria used in the mapping process: study of the area considered only granular deposits greater than one metre thick, and covering an area more than one hectare; and it only considered deposits where the mineral-aggregate thickness was greater than the overburden thickness. Although the scale of mapping did not permit investigation of all small deposits, many small deposits containing existing pits are indicated.

Material Description — Sand and gravel has a variety of applications, such as concrete for construction, asphalt concrete, subbase and base course aggregate for roads, gravel and sand for road surfaces, and pit run for fill. Gradation, rock hardness, and binding characteristics, are some of the specific qualities that are considered in aggregating its end use. This map indicates these, and other, geological qualities of the sand and gravel within each deposit, but does not indicate their potential uses. The terms used in the table are defined in the figure below.

Reserves — The method of calculating in cubic metres the aggregate reserves of deposits took four basic steps. First, the area, in hectares, of each deposit was determined using aerial photographs. Second, geological interpretation, sometimes supported by subsurface information, was assumed in determining the geometry of each deposit; to estimate an overall, average deposit thickness in metres. Third, geological study and limited sample analyses determined the texture (gradation) of sediments in the deposit, and an overall average percentage of gravel and sand. Finally, the volume was calculated as follows: reserve gravel (m³) = area (ha) × thickness (m) × 10,000 × % gravel; the same formula was used for sand.



Texture — The texture of the sediment refers to the percentage of particles of various sizes. For mineral aggregate, the most important fractions are the gravel and sand. The actual dimensions of the clasts and particles in these fractions are given in the figure. The values given for a particular deposit were determined from a field estimate, or from laboratory analysis, of one or more samples from that deposit. Where more than one sample is taken the tabulated number is the mean value.

Wear — The resistance of gravel-size clasts to wear or abrasion can be measured in a laboratory test (ASTM-C131, Los Angeles Abrasion Test). The amount of material that breaks down into smaller sizes is measured and related to the original sample weight in terms of percent wear. The higher the percentage wear the more susceptible the gravel is to breakdown under stress. Gravel with a percentage wear of less than 40 is considered very resistant.

Overburden Thickness — The thickness of non-economic material, or overburden, covering a deposit, sometimes is a limiting factor in the exploitation of an aggregate deposit. The tabulated values given are approximate overburden thicknesses as determined from geological investigations and subsurface testing.


Deposit Area — Deposits in this study were delineated by interpretation of aerial photographs and the contacts should be considered approximate. Information is precise only where test holes, or geological sections, are indicated.

Deposit Genesis — The genesis, or formation, of deposits is vital to the understanding of the gradational nature, extent and geometry of the deposit. This understanding forms the basis for extrapolation from a limited number of known points (test holes, pits, sections) and permits an overall assessment of the deposit.

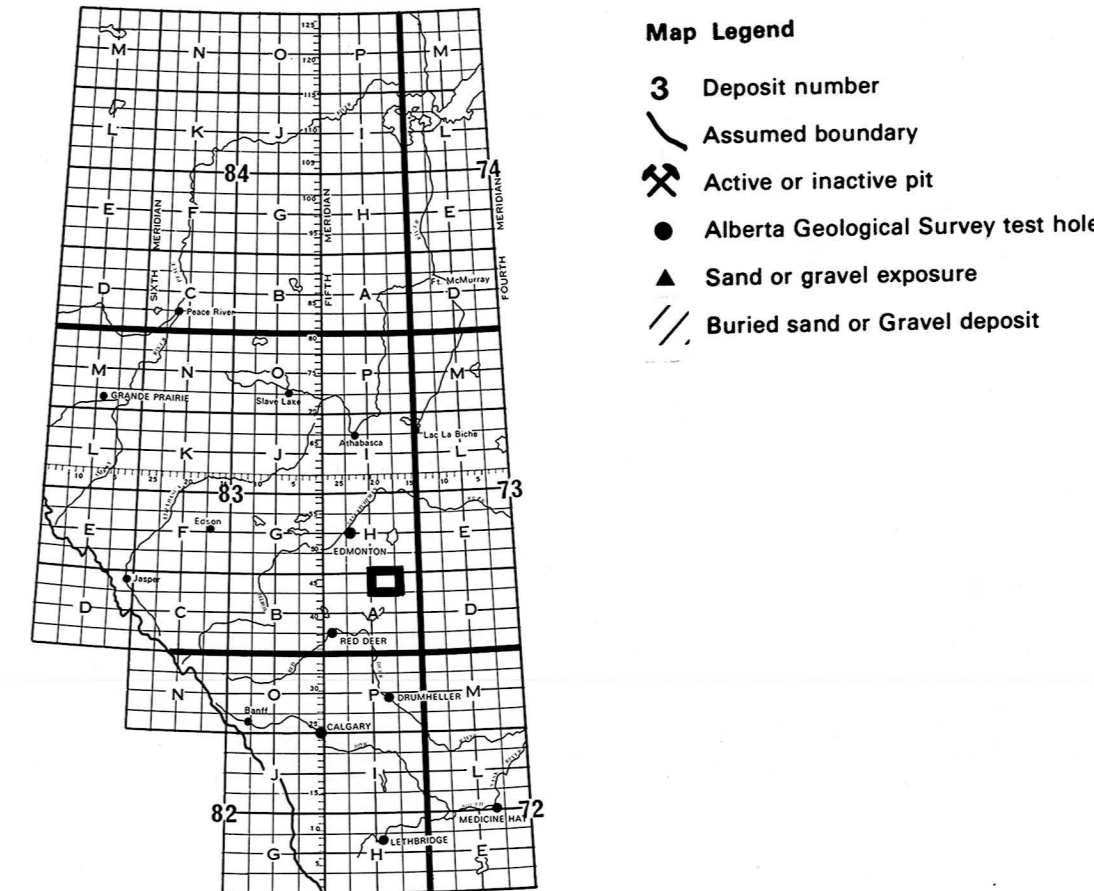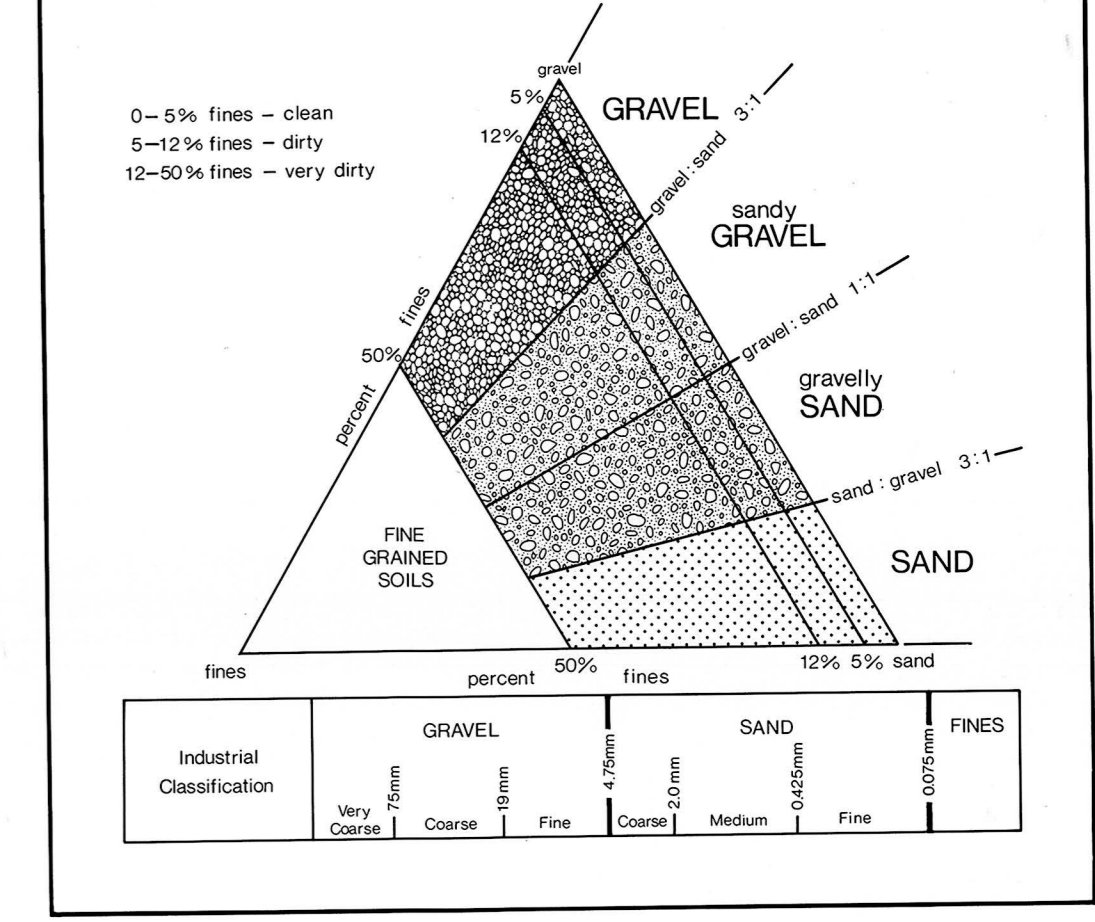

FERINTOSH

CAMBROSE COUNTY ALBERTA WEST OF FOURTH MERIDIAN - OUEST DU QUATRIEME MERIDIEN Scale 1:50,000 Echelle



Produced by the SURVEYS AND MAPPING BRANCH, DEPARTMENT OF ENERGY, MINES AND TECHNICAL SERVICES... Includes a list of symbols for roads, rivers, and other features.

Base: by the DIRECTION DES LÉVÉS ET DE LA CARTOGRAPHIE, MINISTÈRE DE L'ÉNERGIE, DES MINES ET DES RESSOURCES... Includes a list of symbols for roads, rivers, and other features.

Aggregate Resources

83A/15 Ferintosh

P. Sham Published 1983 Geology and compilation 1983. Additional information from A. Mac S. Stalker, 1960.

This is a sand and gravel resource map prepared by the Alberta Geological Survey as part of a series of maps at a scale of 1:50,000. The series represents an ongoing aggregate inventory of Alberta which provides data for general land-use planning, land management or aggregate exploration. Please note that the generation of deposits and calculation of reserves are approximate only. Alberta Energy and Natural Resources provides financial support for the Aggregate Inventory.

ALBERTA RESEARCH COUNCIL Natural Resources Division Alberta Geological Survey