

GENERAL COMMENTS

DEPOSIT CHARACTERISTICS

Deposit Number	Material Description	Reserves (10000 m³)		Additional Comments	Texture (%)			Overburden Thickness (m)	Deposit Thickness (m)	Deposit Area (ha)	Deposit Genesis	Additional Comments
		Gravel	Sand		Gravel	Sand	Fines					
1	Clean sandy gravel and sand	~100	~300	Alternating coarse to fine sandy gravel beds and coarse to medium grained sand beds. Coal particles present. Remaining reserves are minimal.	40	60	<2	0	10	<4	Ouwash	Quartzite clasts predominant but up to 25% of clasts are of Precambrian Shield origin.
2	Variable	-	-	Poorly stratified granular material, variable in grain size, ranges from gravel with 20% sand to fine grained sand. Gravel is coarse. Granular material mixed with large blocks or beds of till.	-	-	-	-	up to 20	20	Kame	Gravel composed of up to 50% crystalline clasts from Precambrian Shield. Some of these clasts are highly weathered and along with other soft concretionary ironstone fragments from local bedrock make up as much as 10% of material in places.
3	Clean sand	-	150	Medium grained sand. Near surface water table. Material may have some potential for fine aggregate for concrete or mortar usage but would require screening and washing.	4	85	1	0	<2	~13	Beach	Beach developed in remnant of glacial lake. Lake was drained early this century. Beach is about 65 m wide, 2 km long.

Deposit Number — Granular deposits shown on this map may have commercial possibilities. That assumption followed from two criteria used in the mapping process: study of the area considered only granular deposits greater than one metre thick, and covering an area more than one hectare; and it only considered deposits where the mineral-aggregate thickness was greater than the overburden thickness. Although the scale of mapping did not permit investigation of all small deposits, many small deposits containing existing pits are indicated.

Material Description — Sand and gravel has a variety of applications, such as concrete for construction, asphalt concrete, subbase and base course aggregate for roads, gravel and sand for road surfaces, and pit run for fill. Gradation, rock hardness, and binding characteristics, are some of the specific qualities that are considered in aggregate towards determining its end use. This map indicates these, and other, geological qualities of the sand and gravel within each deposit, but does not indicate their potential uses. The terms used in the table are defined in the figure below.

Reserves — The method of calculating in cubic metres the aggregate reserves of deposits took four basic steps. First, the area, in hectares, of each deposit was determined using aerial photographs. Second, geological interpretation, sometimes supported by subsurface information, was assumed in determining the geometry of each deposit, to estimate an overall, average deposit thickness in metres. Third, geological study and limited sample analyses determined the texture (gradation) of sediments in the deposit; and an overall average percentage of gravel and sand. Finally, the volume was calculated as follows: reserve gravel (m³) = area (ha) x thickness (m) x 10,000 x % gravel; the same formula was used for sand.


Texture — The texture of the sediment refers to the percentage of particles of various sizes. For mineral aggregate, the most important fractions are the gravel and sand. The actual dimensions of the clasts and particles in these fractions are given in the figure. The values given for a particular deposit were determined from a field estimate, or from laboratory analysis, of one or more samples from that deposit. Where more than one sample is taken the tabulated number is the mean value.

Wear — The resistance of gravel-size clasts to wear or abrasion can be measured in a laboratory test (ASTM C131, Los Angeles Abrasion Testing). The amount of material that breaks down into smaller sizes is measured and related to the original sample weight in terms of percent wear. The higher the percentage wear the more susceptible the gravel is to breakdown under stress. Gravel with a percentage wear of less than 40 is considered very resistant.

Overburden Thickness — The thickness of non-economic material, or overburden, covering a deposit, sometimes is a limiting factor in the exploitation of an aggregate deposit. The tabulated values given are approximate overburden thicknesses as determined from geological investigations and subsurface testing.


Deposit Area — Deposits in this study were delineated by interpretation of aerial photographs and the contacts should be considered approximate. Information is precise only where test holes, or geological sections, are indicated.

Deposit Genesis — The genesis, or formation, of deposits is vital to the understanding of the gradational nature, extent and geometry of the deposit. This understanding forms the basis for extrapolation from a limited number of known points (test holes, pits, sections) and permits an overall assessment of the deposit.

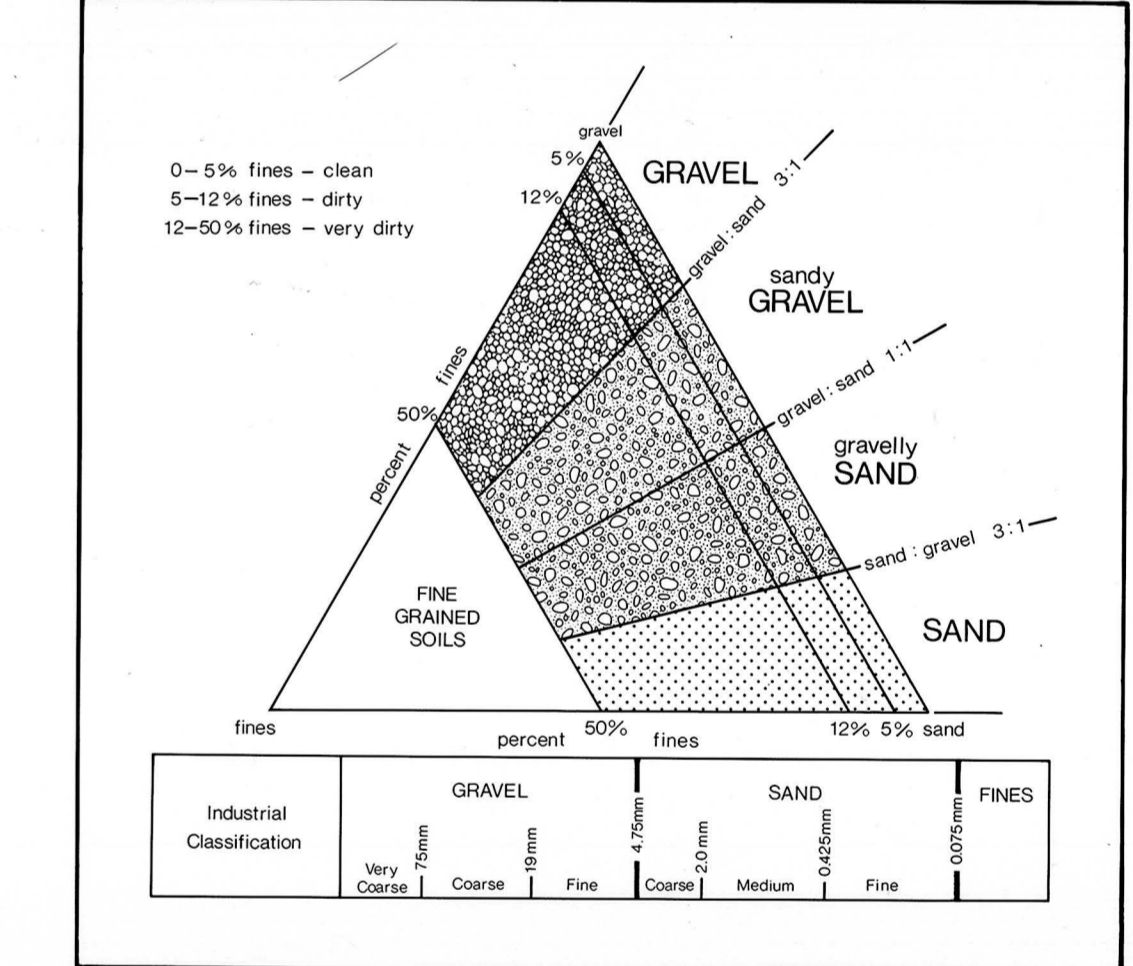

Map Legend


- 3 Deposit number
- Assumed boundary
- Active or inactive pit
- Alberta Geological Survey test hole
- Sand or gravel exposure
- Buried sand or Gravel deposit

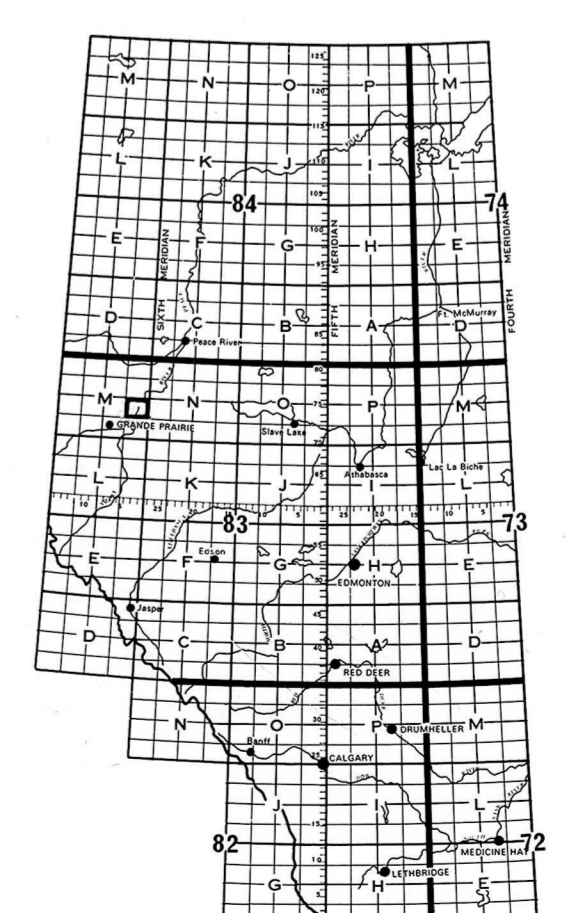

Produced by the SURVEYS AND MAPPING BRANCH, DEPARTMENT OF ENERGY, MINES AND REVENUE, Ottawa, Ontario, Canada, 1978. Catalogue number 1572. Printed 1978.

Roads: loose or established surface, all-weather; loose surface, dry weather and unsealed drains; cart track; trail, cut, line or portage.


Roads: gravel-surfaced, loose surface; gravel, temp. sec. et courtes courbes; déblais; sentier, parcelle ou portage.

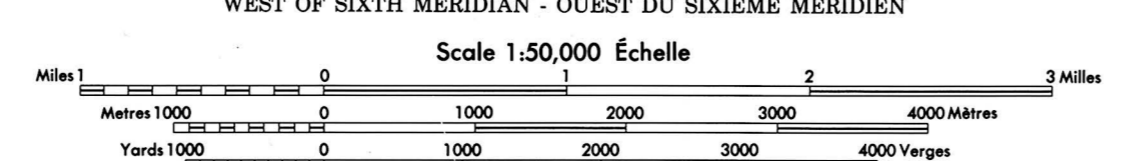

This Provisional Map is equivalent to a standard map in accuracy of content. Some names on this map are not yet official. Corrections or additions are invited by the Surveys and Mapping Branch.

Cette carte provisoire équivaut à une carte régulière au point de vue de sa précision de contenu. Certains noms inscrits sur cette carte ne sont pas encore officiels. La Direction des levés et de la cartographie accepte par ce point de vue les suggestions d'omissions et d'ajouts.

Établi par la DIRECTION DES LEVÉS ET DE LA CARTOGRAPHIE, MINISTÈRE DE L'ÉNERGIE, DES MINES ET DES REVENUES. Mise à jour à l'aide de photographies aériennes prises en 1976. Vérification des données en 1977. Imprimé en 1978.

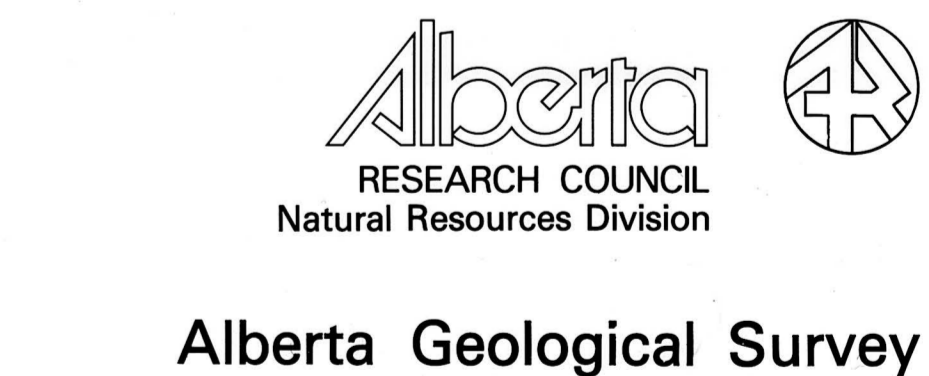

This is a sand and gravel resource map prepared by the Alberta Geological Survey as part of a series at a scale of 1:50,000. The series represents an ongoing aggregate inventory of Alberta which provides data for general land-use planning, land management or aggregate exploration. Please note that the delineation of deposits and calculation of reserves are approximations only. Alberta Energy and Natural Resources provides financial support for the Aggregate Inventory.

REFERENCES
Geology by B.N. Peterson, 1977 and 1978. Compilation by W.A.D. Edwards and M. Price, 1982. Additional information from J.F. Jones, 1961 and 1966 and M.E. Hoyer, 1972.

AGGREGATE RESOURCES
SMOKY HEIGHTS 83M/8