

GENERAL COMMENTS

DEPOSIT CHARACTERISTICS

Deposit Number	Material Description	Reserves (1000 m ³)		Additional Comments	Texture (%)			Overburden Thickness (m)	Deposit Thickness (m)	Deposit Area (ha)	Deposit Genesis	Additional Comments	
		Gravel	Sand		Gravel	Sand	Fines						
1	Sand	0	1000	Sand medium grained, well-sorted, clean.	0	100	0	-	0	6	32	Kame	
2	Gravelly sand	5	6	Sand medium and coarse grained; gravel coarse and fine.	48.9	50.5	0.6	-	1.5	1.5	1.5	Recent alluvial	
3	Sandy gravel	2650	2639	Gravel fine with some coarse; sand fine grained, clean.	50.0	49.8	0.2	-	0.8 to 4.2	3 to 6	280	Pre-glacial alluvial	
4	Sandy gravel and gravelly sand	338	397	Sand fine to coarse grained, clean; gravel coarse.	31.5 to 58.7	40.8 to 64.3	0.5 to 3.8	-	0	1.8 to 4.6	50	Kame	
5	Gravelly sand	13	22	Sand fine to coarse grained, clean; gravel coarse and fine.	35.9	63.5	0.6	-	0 to 1.5	4.6	1.5	Kame	
6	Sand	2	7	Sand fine to coarse grained, clean; gravel coarse and fine.	21.5	77.7	0.8	-	0.5	2.4	0.8	Kame	
7	-	-	-	Assumed on basis of surface mapping or airphoto interpretation.	-	-	-	-	-	-	-	Marginal stream	

Deposit Number — Granular deposits shown on this map may have commercial possibilities. That assumption followed from two criteria used in the mapping process: study of the area considered only granular deposits greater than one metre thick, and covering an area more than one hectare; and it only considered deposits where the mineral aggregate thickness was greater than the overburden thickness. Although the scale of mapping did not permit investigation of all small deposits, many small deposits containing existing pits are indicated.

Material Description — Sand and gravel has a variety of applications, such as concrete for construction, asphalt concrete, subbase and base course aggregate for roads, gravel and sand for road surfacing, and pit run for fill. Gradation, rock hardness, and binding characteristics, are some of the surface, and pit run for fill. Gradation, rock hardness, and binding characteristics, are some of the surface, and pit run for fill. Gradation, rock hardness, and binding characteristics, are some of the surface, and pit run for fill. Gradation, rock hardness, and binding characteristics, are some of the surface, and pit run for fill.

Reserves — The method of calculating in cubic metres the aggregate reserves of deposits took four basic steps. First, the area, in hectares, of each deposit was determined using aerial photographs. Second, geological interpretation, sometimes supported by subsurface information, was assumed in determining the geometry of each deposit, to estimate an overall, average deposit thickness in metres. Third, geological study and limited sample analyses determined the texture (gradation) of sediments in the deposit, and an overall average percentage of gravel and sand. Finally, the volume was calculated as follows: reserve gravel (m³) = area (ha) × thickness (m) × 10,000 × % gravel; the same formula was used for sand.


Texture — The texture of the sediment refers to the percentage of particles of various sizes. For mineral aggregate, the most important fractions are the gravel and sand. The actual dimensions of the clasts and particles in these fractions are shown in the figure. The values given for a particular deposit were determined from a field estimate, or from laboratory analysis, of one or more samples from that deposit. Where more than one sample is taken the tabulated number is the mean value.

Wear — The resistance of gravel-size clasts to wear or abrasion can be measured in a laboratory test (ASTM-C131, Los Angeles Abrasion Testing). The amount of material that breaks down into smaller sizes is measured and related to the original sample weight in terms of percent wear. The smaller the percent wear the more susceptible the gravel is to breakdown under stress. Gravel with a percentage wear of less than 40 is considered very resistant.

Overburden Thickness — The thickness of non-economic material, or overburden, covering a deposit, sometimes is a limiting factor in the exploitation of an aggregate deposit. The tabulated values given are approximate overburden thicknesses as determined from geological investigations and subsurface testing.


Deposit Area — Deposits in this study were delineated by interpretation of aerial photographs and the contacts should be considered approximate. Information is precise only where test holes, or geological sections, are indicated.

Deposit Genesis — The genesis, or formation, of deposits is vital to the understanding of the glacial nature, extent and geometry of the deposit. This understanding forms the basis for extrapolation from a limited number of known points (test holes, pits, sections) and permits an overall assessment of the deposit.

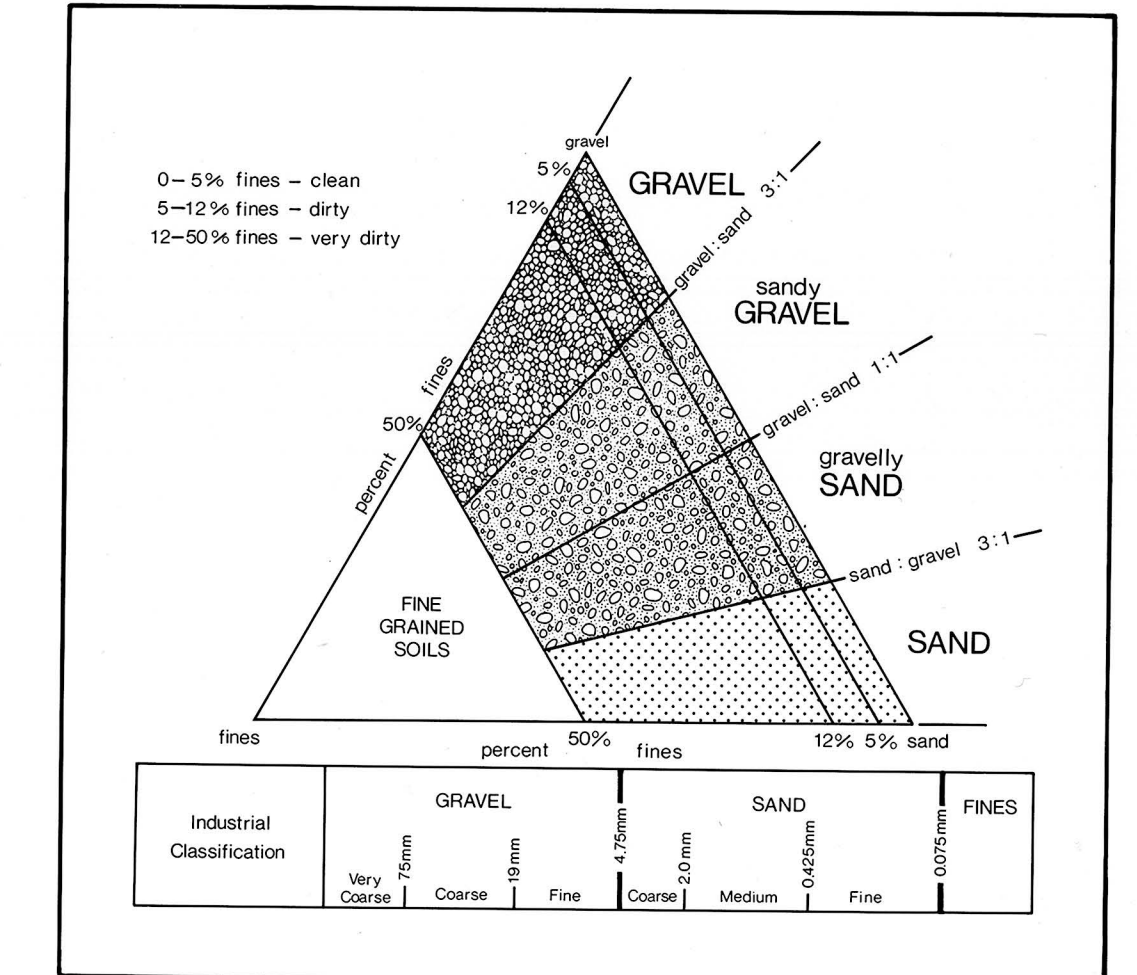

Map Legend

- 3 Deposit number
- Assumed boundary
- Active or inactive pit
- Alberta Geological Survey test hole
- Sand or gravel exposure
- Buried sand or Gravel deposit

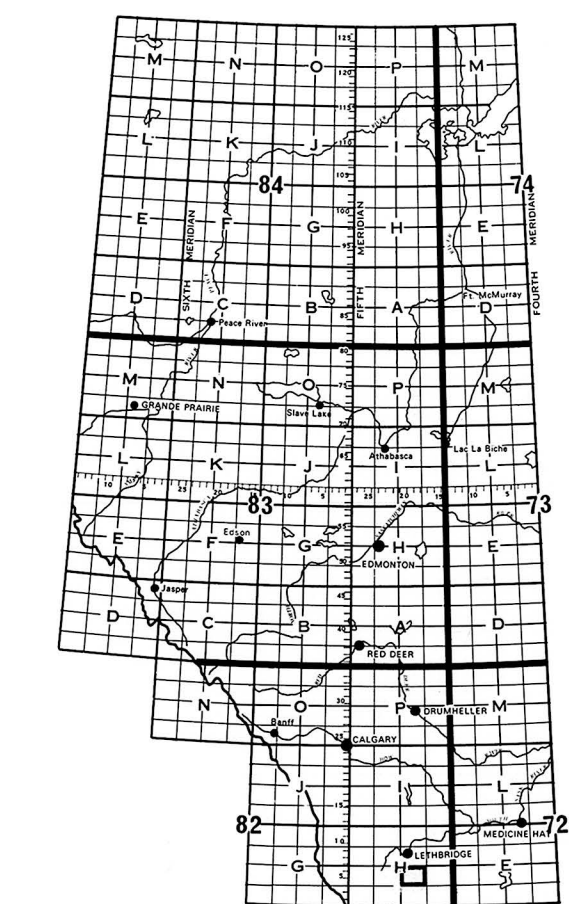

Prepared by the SURVEYS AND MAPPING BRANCH, MINISTRY OF ENERGY, MINES AND TECHNICAL SERVICES, under the authority of the Survey Act, R.S.C. (1985), Chapter S-26. Copyright Reserved 1975.

Produit par le BUREAU DES LEVÉS ET DE LA CARTOGRAPHIE, MINISTÈRE DE L'ÉNERGIE, DES MINES ET DES SERVICES TECHNIQUES, en vertu de la Loi sur les levés de terrain, R.S.C. (1985), Chapitre S-26. Tous droits réservés 1975.

Scale 1:50,000 Échelle 1:50,000

RAYMOND ALBERTA
WEST OF FOURTH MERIDIAN - OUEST DU QUATRIÈME MÉRIDIEN

Scale 1:50,000 Échelle 1:50,000

Contours Interval 25 Feet
Contour Interval 7.62 Metres

Produit par le BUREAU DES LEVÉS ET DE LA CARTOGRAPHIE, MINISTÈRE DE L'ÉNERGIE, DES MINES ET DES SERVICES TECHNIQUES, en vertu de la Loi sur les levés de terrain, R.S.C. (1985), Chapitre S-26. Tous droits réservés 1975.

Produit par le BUREAU DES LEVÉS ET DE LA CARTOGRAPHIE, MINISTÈRE DE L'ÉNERGIE, DES MINES ET DES SERVICES TECHNIQUES, en vertu de la Loi sur les levés de terrain, R.S.C. (1985), Chapitre S-26. Tous droits réservés 1975.

Alberta
RESEARCH COUNCIL
Natural Resources Division

Alberta Geological Survey

This is a sand and gravel resource map prepared by the Alberta Geological Survey as part of a series at a scale of 1:50,000. The series represents an ongoing aggregate inventory of Alberta which provides data for general land-use planning, land management or aggregate exploration. Please note that the delineation of deposits and calculation of reserves are approximations only. Alberta Energy and Natural Resources provides financial support for the Aggregate Inventory.

REFERENCES:
Geology and compilation by I. Shessen; revised from Earth Sciences Report 81-4.

AGGREGATE RESOURCES
RAYMOND 82H/7